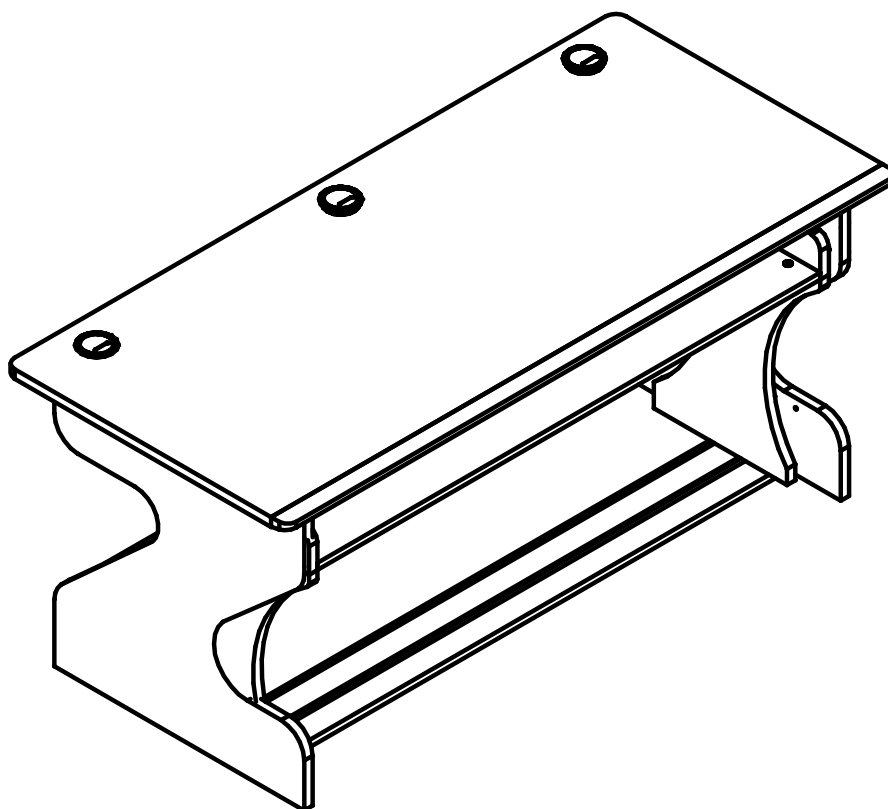




BUDGET CUSTOM DESIGN



Miza Z

Assembly Manual

Assembly Manual

Thank you for choosing a piece of Zaor studio furniture,
which will hopefully make your life easier, more ergonomic and improve the looks of your workspace.
Before you can enjoy the comfort of your new acquisition you need to assemble it.
We have tried to give you as much detail as needed and as little as possible.
Should you run into any difficulty with this assembly you can get in touch with us via
sales@zaorstudiofurniture.com to set up a Skype session or phone call.

Here is a general instruction on how to use the furniture assembly kits:

- 1) Insert and screw in the system bolt(s) into the socket(s) already present on the panel(s)
- 2) Tighten ever so lightly, if using a screwdriver toward the end, do not turn more than 30°!
- 3) Assemble with the connecting panel, aligning the bolts with the round holes in the latter
- 4) Insert the eccentric connector(s) into the round hole(s) and tighten clockwise with a flat screwdriver or a 4mm Allen key (about 90°)



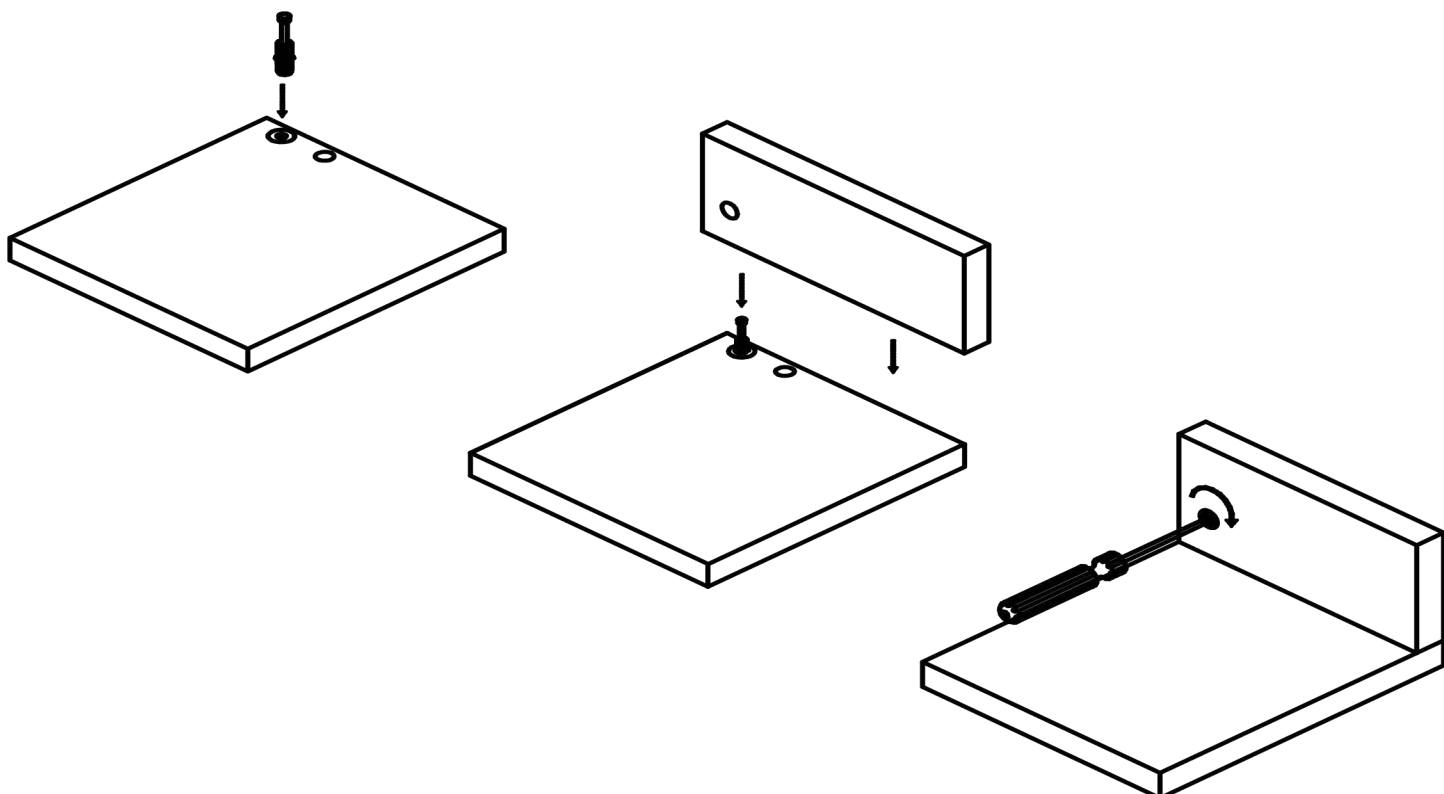
Expanding socket




System bolt













Eccentric fitting





Assembly Manual

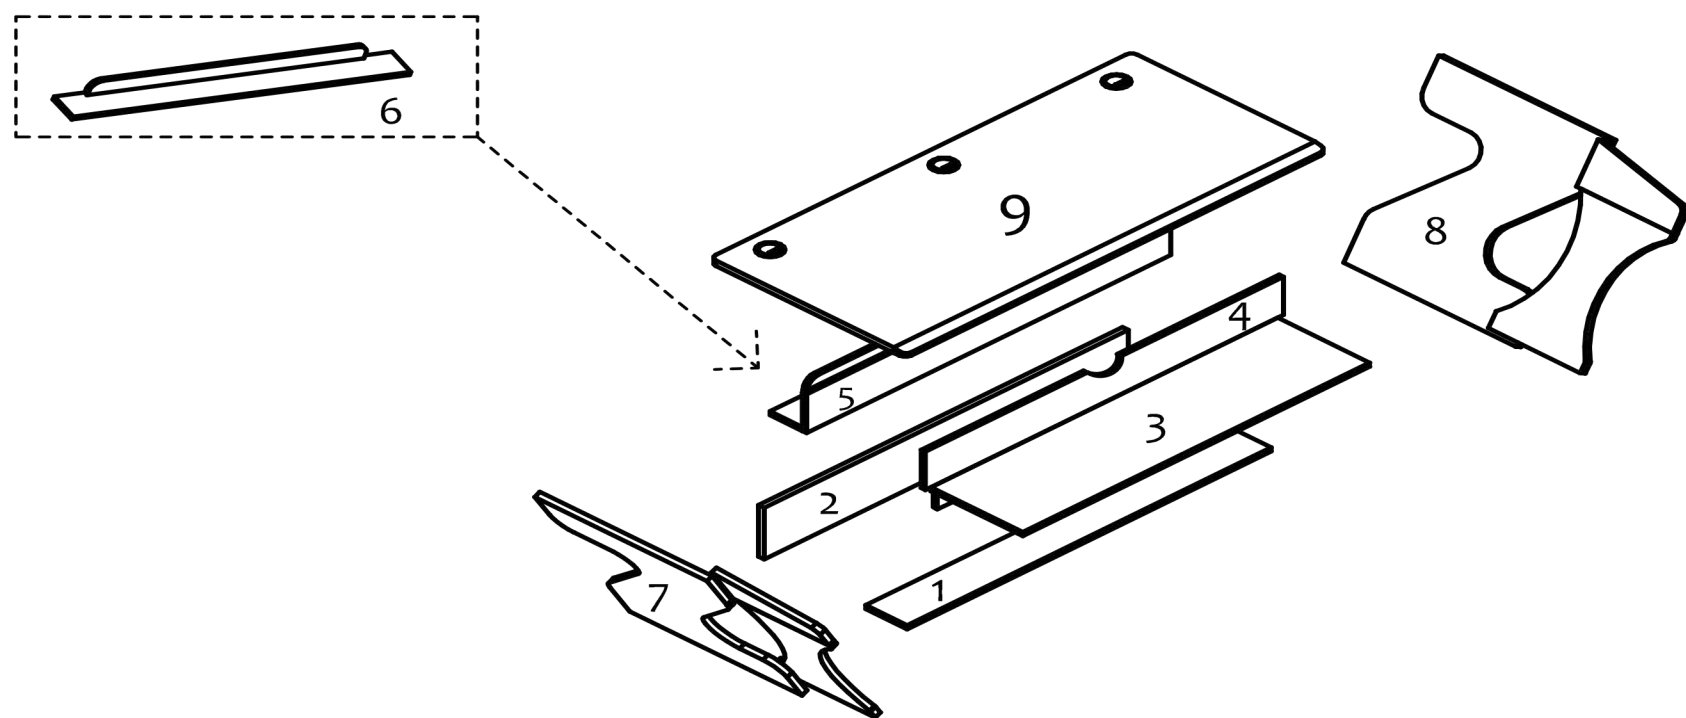

<p>Panel n° 1 Footrest</p> 	<p>Panel n° 2 Stabilising crossbar</p> 	<p>Panel n° 3 keyboard drawer</p> 	<p>Panel n° 4 back wall keyboard drawer</p> 	<p>Panel n° 5 cable tray</p> 
<p>Panel n° 6 cabel try</p> 	<p>Panel n° 7 left side part</p> 	<p>Panel n° 8 right side part</p> 	<p>Pannello n° 9 table top</p> 	<p>Assembly kit</p> 

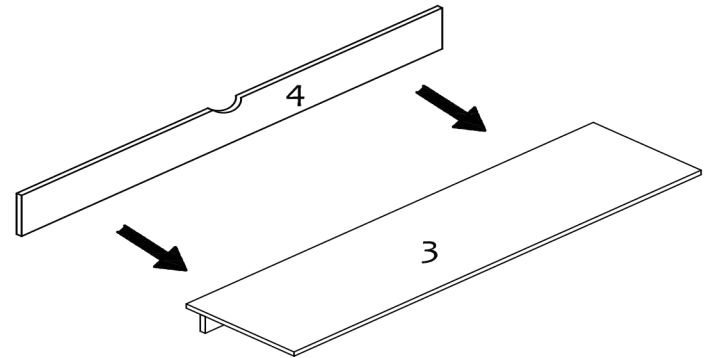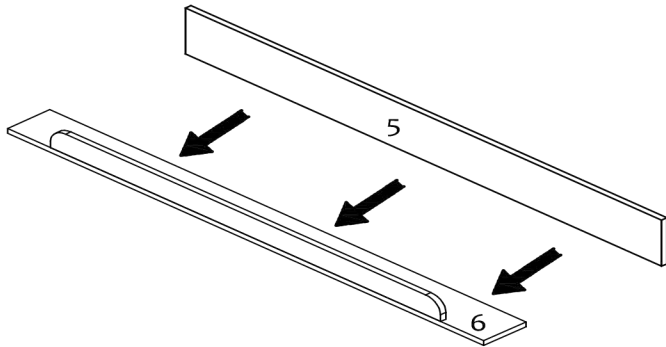Assembly Manual





STEP 1

Join panels n° 5 and n° 6 and fixate using the accentric fittings and (pre-mounted) system bolts. (drawing 1).

STEP 2

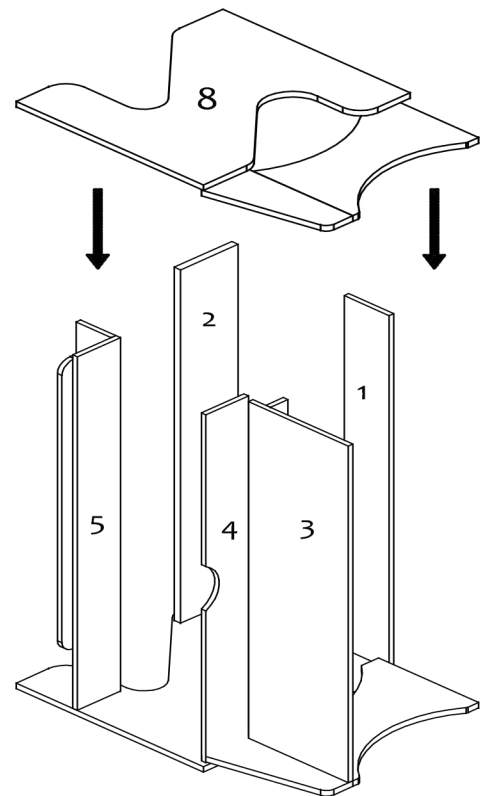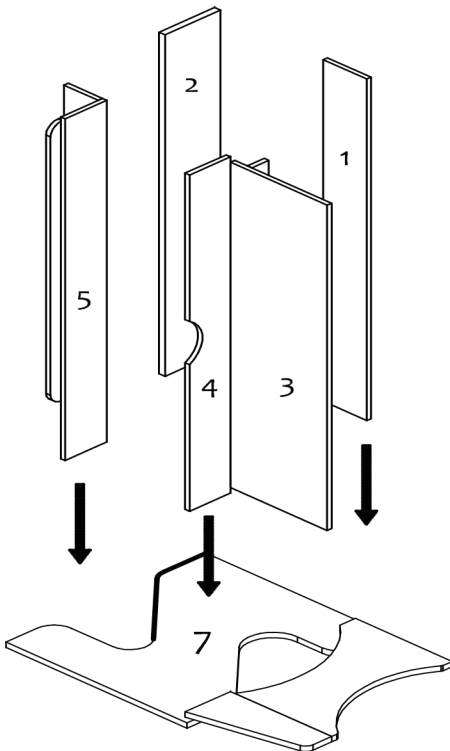Join panels n° 4 and n° 3 and fixate with furniture kits. (drawing 1).




STEP 3

Lay the draw out side part n° 7 on the ground (use cloth, carpet or cardboard) and add panels n° 1 thru 6 and fixate using kits (drawing 1).

STEP 4

Add draw out side part n° 8 from the top and fixate using kits.

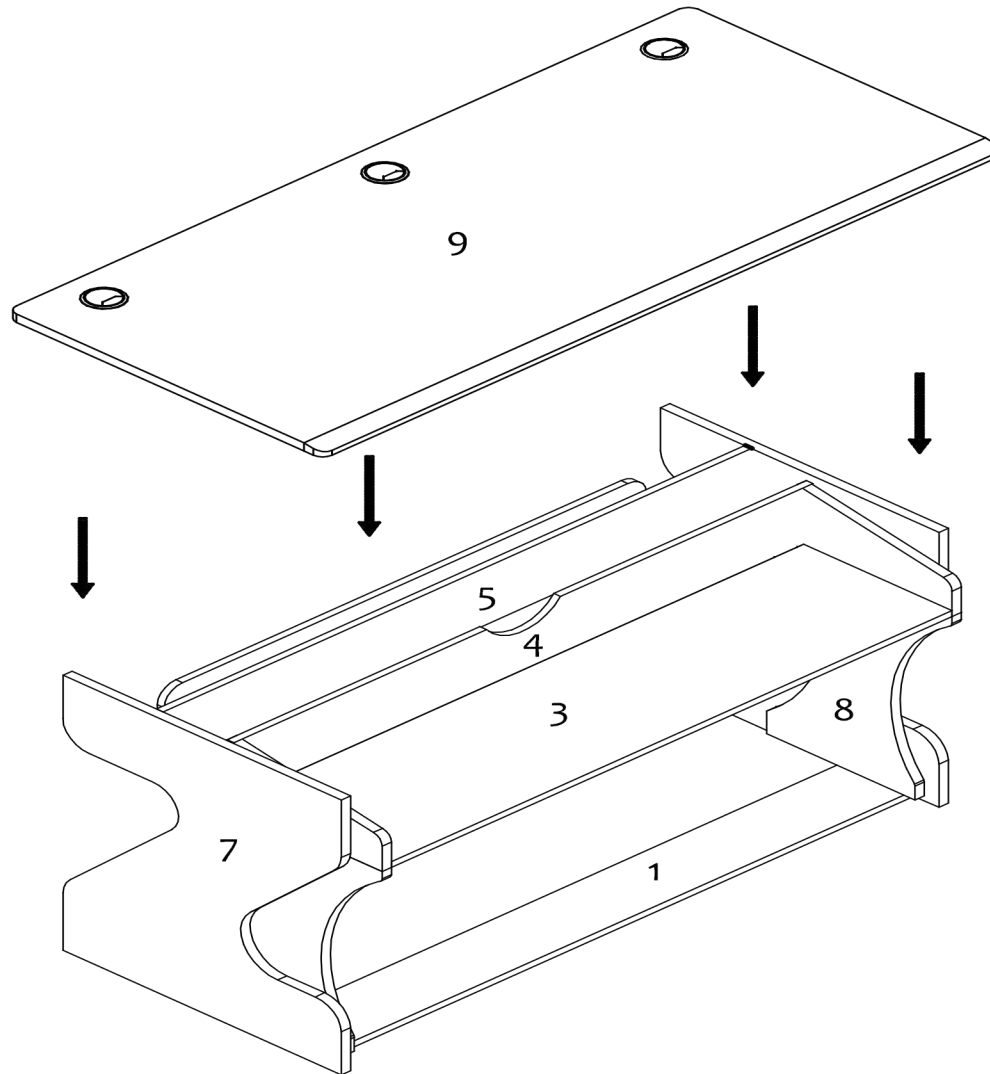Assembly Manual



STEP 5
Set the base of the desk on its legs as shown and lower the desktop panel n° 9 into the corresponding holes. Fixate with eccentric fittings to complete.
N.B. After one week check tightness of fittings and if needed re-tighten.

MATERIALS USED:

- Laminated chipboard and tainted solid wood (ash or oak);

PACKING LIST:

- N° 43 assembly kit, consisting of 1 system bolt + 1 eccentric fitting each;
- N° 9 wood panels;
- N° 4 drawer rails (pre-installed);
- N° 3 hinges (pre-installed);

MAINTENANCE AND CLEANING:

- use a humid cloth or wood cleaning product;
- avoid using abrasive cleaners;

WE RECOMMEND ASSEMBLING WITH 2 PEOPLE.